



■ 630A Round connecting bushing

ARB-24/630/□ For 24kV 630A Applications

APPLICATION

- For Cable Branch Unit apparatus
- System voltage(Um) of 24kV
- Continuous Current 630 A.
- For indoor and outdoor installations.
- Mounting in vertical or horizontal position.

STANDARDS

- meets the interface requirements of CENELEC HD506 S1, ANSI/IEEE 386, DIN 47636
- Has been tested with mating parts to IEC 60502-4 and CENELEC HD 629.1 S1


QUALITY ASSURANCE

- Our manufacturing facility is registered to ISO 9001-2000 by third party audit.
- Required production test.
- 100% factory tested.

PACKAGING

- Supplied in a kit with all necessary parts.

Dimensions structure

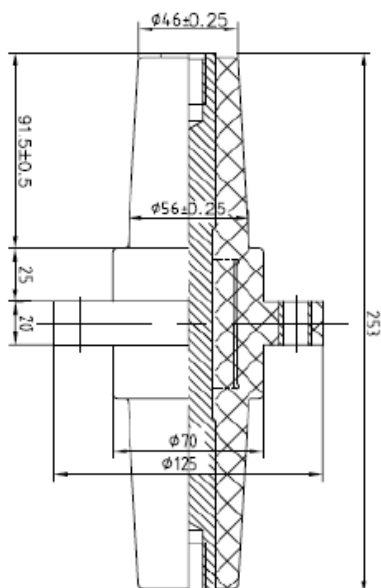

Electrical Ratings

Maximum system voltage(Um)	24kV
Impulse	125kV
AC withstand(1 Min)	54kV
P.D test at 30kV	<10pC
Continuous current	630A

Note: Rating are based on IEC standards and do not reflect maximum capability.

AMPLETEK POWER SYSTEM -----ISO 9001 REGISTERD